



NVR5-8200PXN(MM)

8CH 5MP PoE NVR with NDAA compliance

Provision-ISR's NVR5-8200PXN(MM) is a high-performance network video recorder with an integrated 8-channel PoE switch for high-definition surveillance. This NDAA-compliant, easy-to-install solution is suitable for small-sized installations (up to 8 channels), providing you with everything you need for a trouble-free CCTV project. This model complies with NDAA demands and ensures that your devices are cyber-protected round the clock with the integrated Check Point Quantum IoT Nano agent that provides an advanced threat prevention layer against the common attack vectors at runtime.

8
CH

5
MP

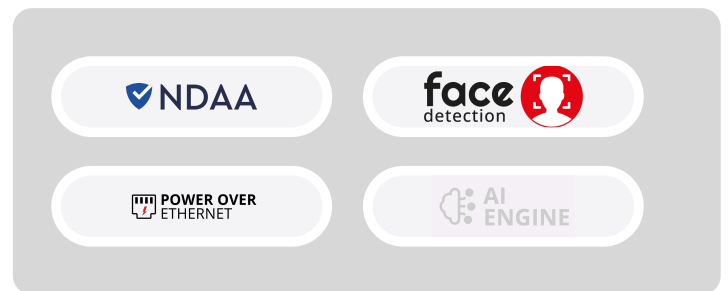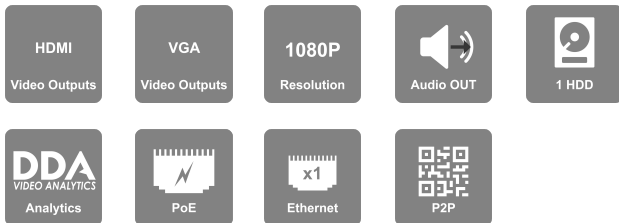

MAIN FEATURES

Video:

- Input: 8 Channel Support
- 8 Channel PoE / Standard Network Connection (Via 8 x RJ-45 / Network)
- Output: HDMI / VGA (1080P, 1280×1024, 1024×768)

Bandwidth:

- Incoming: 64Mbps
- Outgoing: 64Mbps

Decoding Support:

- H.265S/H.265+/H.265/H264

Analytics:

- Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Loitering Detection, Illegal Parking, Audio Exception, Heat Map, Object Counting (Line), Object Counting (Area), Crowd Gathering, People Intrusion, Object Monitoring, Smart Search, Thermal (Limited Support)
- *DDA Analytics Live Snapshots are not supported

Recording:

- 8CH 5MP Real-Time
- FPS: 200 (PAL) / 240 (NTSC)

Playback:

- Local: 8Ch Simultaneously
- Remote: 8Ch Simultaneously

Audio:

- Input: IPC Inputs Only
- Output: IPC Outputs Only

Alarm:

- Input: Based on IPC only
- Output: Based on IPC only

Storage:

- 1 x SATA (Up to 6TB each)

USB Port:

- 2 USB 2.0 Port

Network:

- 1 x RJ-45: 10/100Mbps Each

Remarks:

- The following features are based on firmware v1.4.12_76576_RD250115 and are subject to firmware version changes.



SPECIFICATIONS

3rd Party Cyber Protection	
General	N/A
Protection Methods	N/A
NDAA Compliant	
NDAA Compliant	Yes
Video	
Video Input	8Ch over Network / PoE direct connection
Output	HDMI / VGA (1080P, 1280x1024, 1024x768)
View Mode	Mirrored
Fish-Eye Dewarp	Web Only
Decoding Format	H.265 / H.265+ / H.265S / H.264
Decoding Capabilities	1Ch – 5MP ; 4Ch – 1080P
Audio	
Audio-specs-Input	Based on IPC only
audio-specs-Output	Based on IPC only IP Speaker (only for speaking)
Compression	G.711A/G.711U
Two Way Audio	No
Analytics	
Supported Analytics	Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Loitering Detection, Illegal Parking, Audio Exception, Heat Map, Object Counting (Line),Object Counting (Area), Crowd Gathering, People Intrusion,Object Monitoring, Smart Search, Thermal (Limited Support) *DDA Analytics Live Snapshots are not supported
Analytics Channels (IPC Based)	8Ch (requires supporting IPC)
Analytic Channels (NVR Based)	N/A
Face Recognition Rate	N/A
Bandwidth	
Incoming	64Mbps

Outgoing	64Mbps
-----------------	--------

Record/ Main Stream

Real-Time Recording	8CH 5MP Real-Time
Record Type	Video / Video + Audio
Recording Modes	Schedule, Manual, Motion, Sensor, Analytics, POS and all of its combinations
16MP	N/A
12MP	N/A
8MP	N/A
5MP and lower	240FPS(NTSC)/200FPS(PAL)
Master stream over network	Up to 8CH@Recording Resolution

Substream

Resolution substream	Depends on IPC
-----------------------------	----------------

Remote view

Max Channel View	40Ch (Limited to Outgoing Bandwidth Capacity)
-------------------------	---

Remote Applications

User Access	64 Users online with Professional Authority Management
Mobile App	Provision Cam2 for iOS/Android
PC/Mac Software	Ossia VMS Standard / Enterprise
Plug-in free Web-Browser	Chrome, FireFox, Safari, Edge, Opera. (All Limited to 4Ch Live View / Playback) *P2P WEB connetion always requires Plugin
Plug-in based Web-Browser	Internet Exporer

Playback

Local	8Ch
Remote	8Ch

Search Mode	DDA Object, Smart Search, Time-Slice, Time, Event, POS
--------------------	--

Backup

USB	2 USB 2.0 Port
Backup Format	AVI (Unencrypted) / Private Format (Encrypted / Unencrypted)

Alarm

Alarm-in	Based on IPC only
Alarm-out	Based on IPC only

Storage

HDD	1
HDD Max Capacity	6TB
E-Sata Support	No
Total HDD Max Capacity	6TB
RAID	N/A

PTZ

Connection	via Network
Supported Controls	Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus
RS-485	N/A

Network

Ethernet	10/100Mbps self-adaptive Ethernet interface
Protocols	TCP/IPv4/IPv6, DHCP, DDNS, NTP, SMTP, SSL/TLS, UPnP, P2P, RTSP, HTTPS, 820.1X, SNMP, Auto Report Input + Output (Ossia VMS)
ONVIF	Full Device Support (Profile T/G, ONVIF Version 20.12)

PoE

PoE Ports	8xRJ45
------------------	--------

NVR5-8200PXN(MM)

Speed	10/100Mbps (10Mbps under CCTV Mode)
Standard	PoE (IEEE802.3AF/AT)
CCTV Mode	Yes (Up to 200m and 10Mbps bandwidth)
Total Power	72W (Average 9W per Channel)
Max. Power Output (Per Ch.)	~25.5W

Others	
Power Supply	DC48V/2.5A
Power consumption (No HDD)	5W
Dimension	W255xD220xH45mm
Operation Temperature	0°C~50°C

NVR5-8200PXN(MM)

DIMENSIONS

