

NVR

Provision-ISR NVRs seamlessly integrate with IP cameras, ensuring efficient video storage and playback via network connections. These versatile devices offer flexibility in system design, eliminating the need for direct IP camera connections and simplifying wiring. Offering Face Recognition and Advanced Video Analytics (DDA™), select models feature alarm inputs and Check Point Quantum IoT Nano agent for enhanced security.




NVR12-16400PFAN(1U)

16CH 12MP PoE NDAA-Compliant Face Recognition NVR with Alarms

Provision-ISR's NVR12-16400PFAN(1U) is an NDAA-compliant high-performance network video recorder with an integrated 16-channel PoE switch for high-definition surveillance, supporting Face Recognition and advanced Video Analytics (DDA). The device, suitable for small-sized installations (up to 16 channels), features 8 alarm inputs + 4 alarm outputs and provides you with everything you need for a trouble-free CCTV project.

16
CH

12
MP

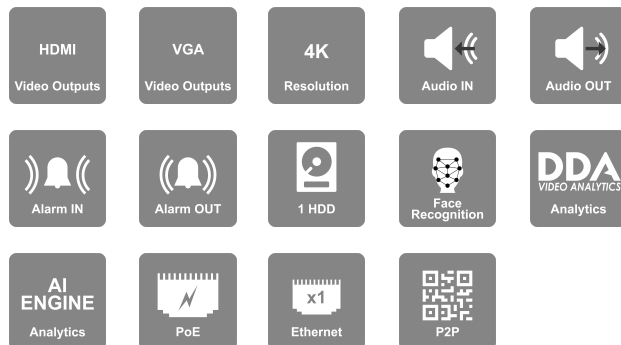

MAIN FEATURES

- NVR12-16400PFAN(1U) Video:
- Input: 16 Channel Support
- 16 Channel PoE / Standard Network Connection (Via 16 x RJ-45 / Network)
- Output: HDMI (4K@60Hz, 4K@30Hz, 1080P), VGA (1080P, 1280×1024, 1024×768) Bandwidth:
- Incoming: 160Mbps
- Outgoing: 160Mbps Decoding Support:
- H.265/H.264 Analytics:
- Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Object Counting (DDA), Crowd Gathering, People Intrusion, Smart Search, Face Recognition, LPR, Thermal (Limited Support).
- Advanced Face Recognition Mode: Supports 2 Non-AI IPCs and performs face detection and recognition. Recording:
- 16CH 8MP Real-Time 12MP – 20FPS
- FPS: 12MP 320 FPS (PAL/NTSC) Playback:
- Local: 16Ch Simultaneously
- Remote: 16Ch on IE, 4Ch on H5 Simultaneously Audio:
- Input: 1CH + IPC Inputs
- Output: 1CH + IPC Output 2 Way Audio Alarm:
- Input: 8+IPC
- Output: 4+IPC Storage:
- 2 x SATA (Up to 8TB each) USB Port:
- 2 USB 2.0 Port + 1 USB 3.0 Port Network:
- 1 x RJ-45: 10/100Mbps Each



<https://provision-isr.com>

SPECIFICATIONS

3rd Party Cyber Protection	
General	N/A
Protection Methods	N/A
NDAA Compliant	
NDAA Compliant	Yes
Video	
Video Input	16Ch over Network
Output	HDMI (4K@60Hz, 4K@30Hz, 1080P), VGA (1080P, 1280x1024, 1024x768)
View Mode	Mirrored
Fish-Eye Dewarp	Local + Web
Decoding Format	H.265 / H.265+ / H.265S / H.264
Decoding Capabilities	1Ch - 12MP ; 4Ch - 2MP
Audio	
Audio-specs-Input	1CH RCA (Linear, 1kΩ) + IPC inputs
audio-specs-Output	1CH RCA (2.0 Vp-p, 1 kΩ) + IPC outputs
Compression	G.711A/G.711U
Two Way Audio	Yes
Analytics	
Supported Analytics	Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Object Counting (DDA), Crowd Gathering, People Intrusion, Smart Search, Face Recognition, LPR, Thermal (Limited Support). Advanced Face Recognition Mode: Supports 2 Non-AI IPCs and performs face detection and recognition.
Analytics Channels (IPC Based)	16Ch (Requires supporting IPC)
Analytic Channels (NVR Based)	Up to 2Ch DDA1 (Sterile Area/Line Crossing) or Up to 2Ch Face Detection + Recognition or Up to 6Ch Face Recognition (or their combinations)
Face Recognition Rate	18 Faces per second (6Ch supported)
Bandwidth	
Incoming	160Mbps
Outgoing	160Mbps

NVR12-16400PFAN(1U)

Record/ Main Stream	
Real-Time Recording	16CH 8MP Real-Time 12MP – 20FPS
Record Type	Video / Video + Audio
Recording Modes	Schedule, Manual, Motion, Sensor, Analytics, POS and all of its combinations
16MP	N/A
12MP	320FPS(PAL/NTSC)
8MP	480FPS(NTSC)/400FPS(PAL)
5MP and lower	480FPS(NTSC)/400FPS(PAL)
Master stream over network	Up to 12CH@Recording Resolution
Substream	
Resolution substream	Depends on IPC
Remote view	
Max Channel View	80Ch (Limited to outgoing Bandwidth Capacity)
Remote Applications	
User Access	64 Users online with Professional Authority Management
Mobile App	Provision Cam2 for iOS/Android
PC/Mac Software	Ossia VMS Standard / Enterprise
Plug-in free Web-Browser	Chrome, FireFox, Safari, Edge, Opera. (All Limited to 4Ch Live View / Playback)
Plug-in based Web-Browser	Internet Explorer
Playback	
Local	16Ch
Remote	16Ch on IE, 4Ch on H5
Search Mode	DDA Object, Smart Search, LPR, Face Recognition, Time-Slice, Time, Event, POS
Backup	

NVR12-16400PFAN(1U)

USB	2 USB 2.0 Port + 1 USB 3.0 Port
Backup Format	AVI (Unencrypted) / Private Format (Encrypted / Unencrypted)

Alarm	
Alarm-in	8+IPC
Alarm-out	4+IPC

Storage	
HDD	2
E-Sata Support	No
RAID	N/A

PTZ	
Connection	via Network
Supported Controls	Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus
RS-485	Yes (C06 Keyboard Connection)

Network	
Ethernet	10/100Mbps self-adaptive Ethernet interface
Protocols	TCP/IPv4/IPv6, DHCP, DDNS, NTP, SMTP, SSL/TLS, UPnP, P2P, RTSP, FTP, HTTPS, 820.1X, SNMP, Auto Report (Ossia VMS)
ONVIF	Full Device Support (Profile T/G, ONVIF Version 20.12)

PoE	
PoE Ports	16xRJ45
Speed	10/100Mbps (10Mbps under CCTV Mode)
Standard	IEEE802.3AF/AT
CCTV Mode	Yes (Up to 200m and 10Mbps bandwidth)
Total Power	150W (Average 9.3W per Channel)
Max. Power Output (Per Ch.)	~15W*

NVR12-16400PFAN(1U)



Others	
Power Supply	12VDC/4A
Power consumption (No HDD)	20W
Dimension	380 × 268 × 48.1 mm
Operation Temperature	0°C~50°C