

PnV SERIES


Quick set-up, easy to use, smart and cost effective: Provision-ISR's Plug & View cameras are ideal for monitoring your home, office or business day & night. Connect to your camera, anytime, anywhere, simply using your smartphone or tablet and Provision ISR's free app (compatible with Android and iOS).



WP-919

OUTDOOR IR FIXED LENS CAMERA

The new WP-919 is the new and improved version of the former WP-818. Together with a new and sleek design, we have also added built-in microphone and speaker while keeping the IP66 outdoor protection rating.

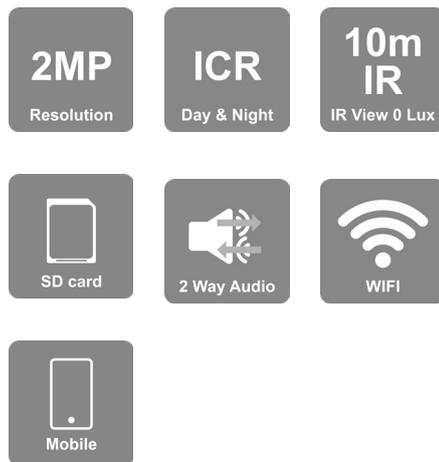

MAIN FEATURES

- 2 Mega-Pixel camera
- Day & night vision
- Wide angle- 3.6mm lens
- Advanced H.264 Compression
- 2 Way Audio with Built-in Speaker/Microphone
- Local recording on Micro SD
- Wireless support (802.11b/g/n)
- Motion detection
- iPhone/iPad/Android viewer app
- iOS/Android Mobile App:
 - Live view
 - Gesture Control
 - Remote playback
 - Local SnapShot/video recording



SPECIFICATIONS

Camera	Video	Image Sensor	1/2.9" CMOS
		Effective Pixels	1920x1080
		Sync System	Progressive Scan
		Electronic Shutter	1/50s ~ 1/100000s
		Day & Night	ICR (Auto)
		Min. Illumination	0.3 Lux (Color), 0 Lux (B&W with IR On)
	Audio	Compression	ADPCM
		Communication	Two Way Audio (Built-In Microphone & Speaker)
	Image Enhancement	Image Settings	Sharpness, Saturation, Brightness & Contrast Adjustable, Auto Gain, Auto Exposure
		WDR Range	No
		Noise Reduction	3D-DNR
		Image Orientation	Mirror/Flip
		Privacy Zone	No
		Motion Detection	Yes
	Compression	Video Compression	H.264+
		Resolution	Main stream:1920x1080 (1080P) Sub stream: 640x360 (360P)
		Multi-Stream	Dual Stream
		Bit-Rate	128Kbps ~ 4Mbps
Encode Mode		VBR	
Image Quality		16 levels under VBR	
Pan/Tilt	Pan	No	
	Tilt	No	

SPECIFICATIONS

Housing	IR Distance	15m (4pcs)
	Lens	4.0mm@F2.0
	Iris	Fixed
	Lens Mount	Φ14 mount
	Water-Proof	IP66
	Bracket	Wall/Ceiling Mount Bracket
	Dimensions	245*107*80mm(L×W×H)
	Weight	375gr
Connectivity	Network	RJ45 + WiFi (802.11 b/g/n)
	Power	DC Socket
	Analog Video Output	No
	Audio Connectivity	No (Built-In Speaker and Microphone)
	SD Card	Micro SD (128GB Max)
	RS-485	No
Network	Alarm	No
	Remote Monitoring	Provision PnV2 Mobile App
	User Access	Supports simultaneous monitoring for up to 4 users
	WPS	No
	ONVIF	No
	Ethernet Speed	100Mbps
Others	PoE	No
	Power Supply	DC12V/1A (540mA)
	Work Environment	-10°C~50°C, 10%~90% Humidity