



1. Intended use:


EN*

The enclosure with a DIN rail for RACK cabinets is intended for mounting equipment located inside DIN enclosures, for RACK 19" cabinets. The enclosure features a DIN rail, length: 24x1S. The height of the mounted module cannot exceed 160mm. The enclosure can accommodate max. 24 fuses, 1 S wide. Six M6 screws with cage nuts for mounting in RACK cabinets are included. The enclosure features a 420x20 mm labeling field.


2. Specifications:

SPECIFICATIONS	
Mounting dimensions	RACK cabinet: W=19", H=3U number of fuses: 24x1S
Dimensions	W=482, H=131, D=235 [mm, +/-2] W₁=435, W₂=444, D₁=70, D₂=162 [mm, +/-2]
Operation temperature range	- 10°C ÷ +40°C
Net/gross weight	3,75 / 3,96 [kg]
Materials	sheet metal DC01, 1,0mm thick rust protection colour: RAL 9005 BLACK
Use	inside
Closing	bolted
Notes	- the enclosure can accommodate max. 24 fuses, 1 S wide - six-point fixing to the front RACK rails - 6 M6 screws + cage nuts included - the enclosure features a 420x20 mm labeling field
Declarations	RoHS

3. Dimensions:

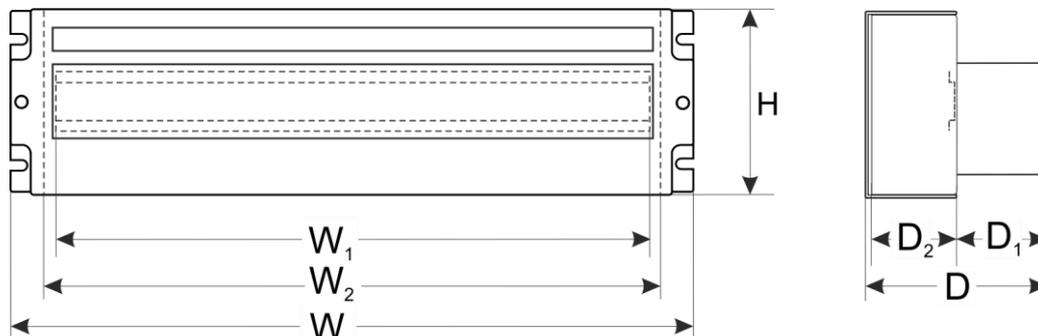

4. Enclosure:

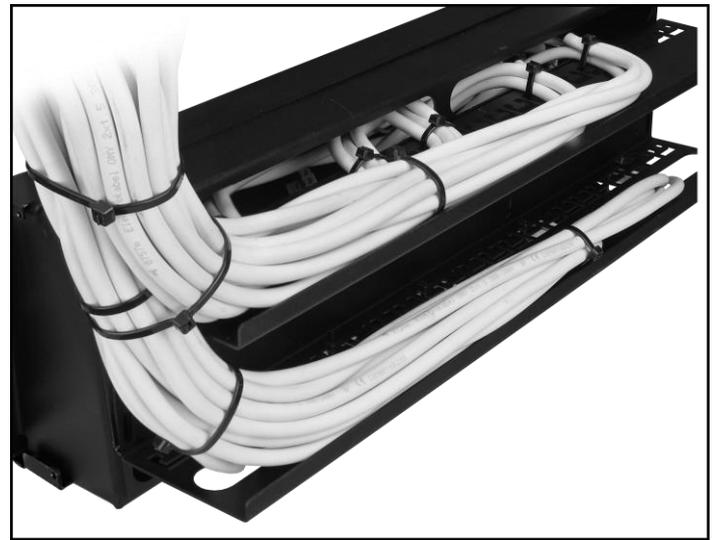

MANUFACTURER

Pulsar K.Bogusz Sp.j.
Siedlec 150,
32-744 Łapczyca, Poland
Tel. (00 48) 14-610-19-40, Fax. (00 48) 14-610-19-50
e-mail: biuro@pulsar.pl
www.pulsar.pl , www.zasilacze.pl

WARRANTY

24 months from the date of purchase.
THE WARRANTY IS VALID only upon presentation of the item's proof of purchase.